

Réponse technique

test ot mac firefox v33

Pour siweb



Réponse technique



VOTRE CONTACT

SOCIETEX

Interlocuteur : ABITBOL Patrick

Mobile : 06 42 90 16 05

Email : mgastel@dwpro.fr

All the applications you need, conveniently bundled for the most complete collaboration experience.

Video conferencing shouldn't just be about having meetings. It should be about accelerating decision making, sharing ideas, collaborating with the larger team and having fun, productive, face-to-face discussions.

With the new LifeSize UVC bundles, you can do that and more.

Everything you need in a turnkey solution

LifeSize UVC bundles give you all of the key applications you need to deliver the most complete collaboration experience to your organization.

Imagine joining one-to-one and group meetings via a centralized directory, scheduling a video meeting from your calendar, easily sharing content and streaming and recording your videos. All this and more is easily accessible from a PC, Mac, mobile device or LifeSize meeting room system.*

Sizes and packages

The bundles come in three sizes—small, medium and large—each designed to provide optimal performance for up to 100, 250 or 500 users. And the LifeSize UVC bundles are scalable to grow with your business, protecting your investment.

Benefits for the user

- ✓ Collaborate via a PC, Mac, mobile or LifeSize meeting room system*
- ✓ Stream and record videos
- ✓ Add callers to meetings as needed

Benefits for the IT admin

- ✓ Manage and scale video infrastructure easily
- ✓ Access all the tools from one web interface
- ✓ Reduce training and support needs

Ready to Get Started? [Contact us](#) or [book a demo](#).

*Through LifeSize Icon, sold separately.



This is a big step toward making video deployments easier to justify, deploy and support. This type of infrastructure “rightsizing” with a gradual expansion path will become the industry norm in the next few years.”
– Ira M. Weinstein,
Wainhouse Research.



LifeSize UVC Bundles + LifeSize® Icon™ ... That's Smart Video

These applications were exclusively designed to work with LifeSize Icon, a high performance video system that enables Smart Video—a radically simplified and frustration-free video conferencing experience.

LifeSize UVC Bundles Configurations

Each LifeSize UVC bundle is designed to provide the best performance based on number of users.

	LifeSize UVC hardware	Mobile video ports	Multiparty calling ports	Video recordings	Video streams	Management seats
Small Up to 100 users	1150 + 1150	15	5	1	25	5
Medium Up to 250 users	1150 + 3350	30	10	1	50	10
Large Up to 500 users	1150 + 1150 + 3350	60	20	1	100	20

Scaling options

- Add multiparty capacity with a LifeSize UVC Multipoint bundle on LifeSize UVC hardware (7 or 20 ports)
- Add capacity to mobile video ports, video recordings, video streams and management seats with expansion license keys

Specifications

Mobile Calling

HD video calling up to 1080p30 on PC and Mac, up to 720p30 on select mobile devices
Unlimited user accounts
Unlimited guest invitations
Ring all devices on your account
Live call transfer between devices
PC, Mac, iOS and Android clients
Data sharing

Call Control

Unified directory
Advanced call routing with call forwarding
Firewall/NAT traversal
Encryption
Dual home support LAN and WAN

Multiparty Calling

Automatic call escalation with LifeSize Icon video systems and LifeSize mobile clients
Up to 60 participants in a single call
18 layouts
On-screen overlays
Data sharing
Encryption
Microsoft® Lync® interoperability

Video Streaming and Recording

Single-button recording
Record audio, video and data
Auto-publishing
Recoding key-based authorization
Live streaming
On-demand streaming
Stream to mobile devices
Chat
Multilanguage Closed Captions (CC)
Reporting

Network Management

All-in-one, easy-to-use, web-based interface for monitoring your video network
Dashboard home screen
Real-time alarms, filter and Work Flow
Plugin-free integration with Microsoft Exchange server 2010 SP1 and Microsoft Exchange server 2007 SP3
Rich calendar interface
System group and directories
Live meeting management
Reporting

Integrated Experience

Tight integration with LifeSize Icon and mobile clients
Automatic network provisioning
Directory push
Simplified user-based dialing
Seamless call escalation

Integrated Web Interface

Integrated web UI for all the applications

Authentication & Authorization

Supports corporate active directory/LDAP integration
Local user management

LifeSize UVC Virtual Machine, Capacity, Hardware Configuration, Storage & Environmental Data

Please refer to the LifeSize UVC applications datasheet for details.



Headquarters

Austin, Texas, USA
+1 512 347 9300
Toll Free US +1 877 543 3749

EMEA Regional Office

Munich, Germany
+49 89 20 70 76 0
Toll Free Europe +00 8000 999 09 799

www.lifesize.com
E-mail info@lifesize.com

APAC Regional Office

Singapore
+65 6303 8370



Delivering the Ultimate Communication Experience

© 2014 Logitech. All rights reserved. Information contained in this document is subject to change without notice. LifeSize is the registered trademark or trademark of Logitech. All other trademarks are the property of their respective owners.

SS_UVCBundles_EN_0214



INTERCALAIRE 2

version 33

All the applications you need, conveniently bundled for the most complete collaboration experience.

Video conferencing shouldn't just be about having meetings. It should be about accelerating decision making, sharing ideas, collaborating with the larger team and having fun, productive, face-to-face discussions.

With the new LifeSize UVC bundles, you can do that and more.

Everything you need in a turnkey solution

LifeSize UVC bundles give you all of the key applications you need to deliver the most complete collaboration experience to your organization.

Imagine joining one-to-one and group meetings via a centralized directory, scheduling a video meeting from your calendar, easily sharing content and streaming and recording your videos. All this and more is easily accessible from a PC, Mac, mobile device or LifeSize meeting room system.*

Sizes and packages

The bundles come in three sizes—small, medium and large—each designed to provide optimal performance for up to 100, 250 or 500 users. And the LifeSize UVC bundles are scalable to grow with your business, protecting your investment.

Benefits for the user

- ✓ Collaborate via a PC, Mac, mobile or LifeSize meeting room system*
- ✓ Stream and record videos
- ✓ Add callers to meetings as needed

Benefits for the IT admin

- ✓ Manage and scale video infrastructure easily
- ✓ Access all the tools from one web interface
- ✓ Reduce training and support needs

Ready to Get Started? [Contact us](#) or [book a demo](#).

*Through LifeSize Icon, sold separately.



This is a big step toward making video deployments easier to justify, deploy and support. This type of infrastructure “rightsizing” with a gradual expansion path will become the industry norm in the next few years.”
– Ira M. Weinstein,
Wainhouse Research.



LifeSize UVC Bundles + LifeSize® Icon™ ... That's Smart Video

These applications were exclusively designed to work with LifeSize Icon, a high performance video system that enables Smart Video—a radically simplified and frustration-free video conferencing experience.

LifeSize UVC Bundles Configurations

Each LifeSize UVC bundle is designed to provide the best performance based on number of users.

	LifeSize UVC hardware	Mobile video ports	Multiparty calling ports	Video recordings	Video streams	Management seats
Small Up to 100 users	1150 + 1150	15	5	1	25	5
Medium Up to 250 users	1150 + 3350	30	10	1	50	10
Large Up to 500 users	1150 + 1150 + 3350	60	20	1	100	20

Scaling options

- Add multiparty capacity with a LifeSize UVC Multipoint bundle on LifeSize UVC hardware (7 or 20 ports)
- Add capacity to mobile video ports, video recordings, video streams and management seats with expansion license keys

Specifications

Mobile Calling

HD video calling up to 1080p30 on PC and Mac, up to 720p30 on select mobile devices
Unlimited user accounts
Unlimited guest invitations
Ring all devices on your account
Live call transfer between devices
PC, Mac, iOS and Android clients
Data sharing

Call Control

Unified directory
Advanced call routing with call forwarding
Firewall/NAT traversal
Encryption
Dual home support LAN and WAN

Multiparty Calling

Automatic call escalation with LifeSize Icon video systems and LifeSize mobile clients
Up to 60 participants in a single call
18 layouts
On-screen overlays
Data sharing
Encryption
Microsoft® Lync® interoperability

Video Streaming and Recording

Single-button recording
Record audio, video and data
Auto-publishing
Recoding key-based authorization
Live streaming
On-demand streaming
Stream to mobile devices
Chat
Multilanguage Closed Captions (CC)
Reporting

Network Management

All-in-one, easy-to-use, web-based interface for monitoring your video network
Dashboard home screen
Real-time alarms, filter and Work Flow
Plugin-free integration with Microsoft Exchange server 2010 SP1 and Microsoft Exchange server 2007 SP3
Rich calendar interface
System group and directories
Live meeting management
Reporting

Integrated Experience

Tight integration with LifeSize Icon and mobile clients
Automatic network provisioning
Directory push
Simplified user-based dialing
Seamless call escalation

Integrated Web Interface

Integrated web UI for all the applications

Authentication & Authorization

Supports corporate active directory/LDAP integration
Local user management

LifeSize UVC Virtual Machine, Capacity, Hardware Configuration, Storage & Environmental Data

Please refer to the LifeSize UVC applications datasheet for details.



Headquarters

Austin, Texas, USA
+1 512 347 9300
Toll Free US +1 877 543 3749

EMEA Regional Office

Munich, Germany
+49 89 20 70 76 0
Toll Free Europe +00 8000 999 09 799

www.lifesize.com
E-mail info@lifesize.com

APAC Regional Office

Singapore
+65 6303 8370



Delivering the Ultimate Communication Experience

© 2014 Logitech. All rights reserved. Information contained in this document is subject to change without notice. LifeSize is the registered trademark or trademark of Logitech. All other trademarks are the property of their respective owners.

SS_UVCBundles_EN_0214

Le Contrat Sérénité DWPro - HUAWEI

Le contrat Sérénité vous permet une totale prise en charge des problèmes techniques que peuvent rencontrer vos clients, dans l'utilisation quotidienne des produits de visioconférence et ses périphériques (meuble, écran) fournis par DWPro.

La souscription à ce contrat vous permet d'obtenir une extension aux garanties constructeurs habituelles (voir descriptif du contrat ci-dessous)

	Garantie constructeur	Contrat Sérénité DWPro
Garantie constructeur du terminal pendant 1 an	✓	✓
En cas de panne, réparation du matériel sous 4 à 6 semaines	✓	✓
Ce que vous apporte le Contrat Sérénité de DWPRO en plus de la Garantie Constructeur		
Mises à jour des logiciels du constructeur (mineures et majeures) pendant toute la durée du contrat	✗	✓
Échange standard des équipements sous garantie à J+1 pendant toute la durée du contrat (après constatation d'une panne matériel avérée)	✗	✓
Assistance téléphonique et/ou par mail illimitée en Français (Hot Line) 5 jours sur 7 du lundi au vendredi de 9H00 à 18H00 (hors jours fériés).	✗	✓
Assistance possible directement par visioconférence.	✗	✓
Un point d'accès dédié pour toutes les demandes d'échanges, de réparations ou prestations techniques complémentaires.	✗	✓
Une vérification annuelle du terminal à distance.	✗	✓
Prise en main du terminal à distance pour dépannage	✗	✓
Tarif préférentiel sur d'éventuelles interventions physiques sur site	✗	✓
En cas de panne, mise à disposition d'une solution alternative de communication sous 24 / 48h	✗	✓

Tous les contrats de maintenance et de services sont réassurés directement auprès du constructeur.

Ce document est un descriptif et ne peut, en aucun cas, faire office de contrat. Valable en France métropolitaine.

MAX® | Wireless**Tabletop Conference Phone****ClearOne®**

The industry's first wireless tabletop conference phone. MAX Wireless provides the flexibility to hold a conference call when and where it's most convenient – with no cables in the way. MAX Wireless is a perfect fit for offices and small conference rooms, and delivers outstanding audio clarity.



UNRIVALED WIRELESS
AUDIO QUALITY,
FLEXIBILITY AND
AFFORDABILITY

MAX WIRELESS APPLICATIONS

Executive Office

Small Office/Home Office

Small Conference Room

Any Room Without a Phone Line

MAX WIRELESS ADVANTAGES**Superior Audio Performance**

- + Distributed Echo Cancellation® effectively eliminates echo
- + Noise cancellation removes background noises from fans or HVAC systems
- + Full-duplex sound enables participants to speak and listen at the same time without cutting in and out
- + Automatic level controls keep participants' audio balanced and consistent
- + First-mic priority eliminates hollow "tunnel" sound by activating only the microphone closest to the person speaking
- + Three microphones provide 360° audio pickup
- + ClearEffect™ provides natural, full-sounding audio without requiring wideband on both ends

Wireless Capabilities

- + Turn any room into a conference room, even one without a phone line
- + Wireless signal range allows use in multiple rooms without moving the base unit
- + Wireless design provides a clean look with no wires on the table or floor
- + 12 hours of talk time allows for lengthy conferences without recharging; 36 hours of standby time reduces recharging frequency; automatic power-save mode conserves battery life
- + Dual-function power supply/charger enables conferencing while charging
- + Digital spread spectrum technology with 64-bit encryption ensures secure conferencing
- + Audible warnings sound when phone is out of range or needs charging
- + Phone paging button allows easy identification of phone's location

Ease of Use & Control

- + Simply plug base unit into power and phone line, charge phone, then dial and talk
- + Features user-friendly telephone style controls
- + Speed dial stores 10 frequently dialed numbers
- + Recording output on base unit connects to a recording device to capture both sides of the conversation

MAX® Wireless Tabletop Conference Phones **DATA SHEET** <> **ROOM APPLICATIONS**

MAX Wireless is a single conference phone that connects wirelessly to a base unit for use in any small room.

> **SPECIFICATIONS****Echo Cancellation**

Tail time: 60 ms x 3

Noise Cancellation

Dynamic noise cancellation

Telephone ConnectionAnalog PBX or PSTN line
RJ-11C, -12 dBm nominal**Radio Frequency**2.4 GHz WDCT
(4) 32 kbps full duplex**Keypad**

Alphanumeric standard keypad

LoudspeakerVolume: 90dBspl A weighted @ 1 ft
Bandwidth: 200 Hz–3.3 kHz**Record Output**Connector: 2.5 mm mono audio jack
Impedance: <1000 ohms
Bandwidth: 200Hz–3.3kHz
Dynamic range: 60dB
THD <.01%**Certifications**FCC part 15/ICES-003 Class A
FCC part 15 Subpart C/RSS-210
FCC part 68/IC CS-03
CE
UL Certified**Power**Phone unit:
Custom battery pack with nickel metal hydride
batteries, 7.2 V 2200 mAh
12 hours continuous talk time (typical)
36 hours standby
Base unit:
Auto-adjusting power module;
100-240 VAC; 50/60Hz**Wireless Range**Standard WDCT units: 150 ft (45 m)
EU WDCT unit: 50 ft (15 m)
Note: these ranges depend on environmental
factors and may vary. The EU unit has a
shorter range due to regulatory restrictions on
power output in the 2.4 GHz frequency band
in the EU.**Environmental**Operating temperature: 32–118° F (0–48° C)
Storage temperature: 41–158° F (5–70° C)
Operating humidity: 15 to 80%
Storage humidity: 10 to 90%**Dimensions (W x D x H)**Phone unit:
10.5" x 10.5" x 3" (26.7 cm x 26.7 cm x 7.6 cm)
Base unit:
4.25" x 5.5" x 2.5" (10.8 cm x 14 cm x 6.4 cm)**Weight**Phone unit: 2.7 lb (1.2 kg)
Base unit: .6 lb (0.27 kg)
Shipping:
MAX Wireless
10 lb (4.5 kg)**MAX Wireless Includes**Wireless phone unit (1)
Base unit (1)
Battery pack (1)
Power supply/charger (1)
Power supply retainer (1)
Telephone cable
Documentation CD
Quick start guide**PART NUMBERS****MAX Wireless (WDCT)**910-158-400 (North America)
910-158-004 (South Korea)
910-158-006 (Hong Kong/Singapore)
910-158-007 (China)
910-158-008 (Australia/New Zealand)
910-158-009 (South Africa)**MAX Wireless (WDCT for EU)**

910-158-276 (Europe/UK)


> **CLEARONE LOCATIONS****Headquarters:**Salt Lake City, UT USA
5225 Wiley Post Way
Suite 500
Salt Lake City, UT 84116
Tel: 801-975-7200
800-945-7730
Fax: 801-977-0087
sales@clearone.com**Latin America**Tel: 801-974-3621
global@clearone.com**EMEA**Tel: 44 (0) 1189 036 053
global@clearone.com**APAC**Tel: 801-303-3388
global@clearone.com

Pré Fiche série L7

- 40L7333DF
- 50L7333DF




TOSHIBA
Leading Innovation >>>

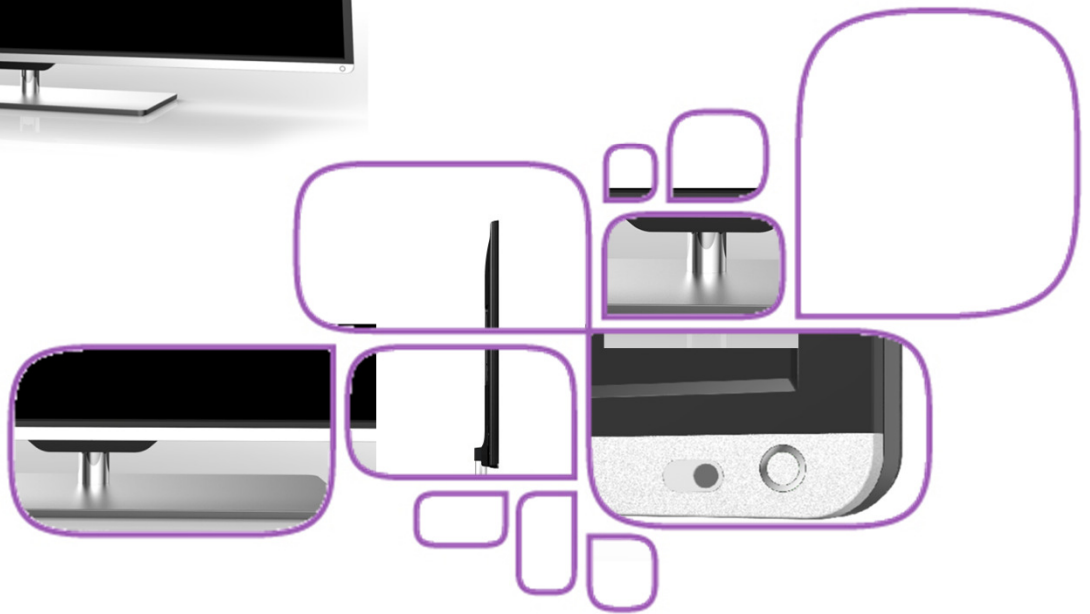

- Téléviseur LED Edge 40'' (102 cm) & 50'' (126cm)
- HDTV 1080p (1920 x 1080 pixels)
- 3D Active (lunettes optionnelles)
- Portail connecté : Cloud TV
- Wifi intégré
- Intel Widi 3.5
- AMR 200
- Cadre fin et noir mat
- 4 HDMI CEC / ARC
- 2 USB (fonction Enregistrement)

 **CloudTV**

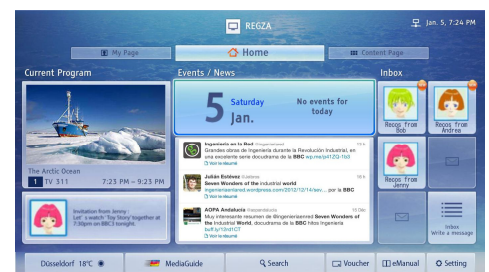

Pré Fiche série L7

Image

Dalle LCD - Ecran 16/9^{ème}
Rétro éclairage par LED Edge
Résolution : 1920x1080 pixels
Taux de contraste dynamique* : TBD
(natif 40'' 4000:1 & 50'' 3000:1)
Luminosité : 40'' 300cd/m2 & 50'' 400 cd/m2
Angle de vision : 178°
Fréquence de balayage : AMR 200 (100 Hz)
Temps de réponse : 40'' 8ms & 50'' 6,5ms
Filtre en peigne numérique (Digital Comb Filter)
Réducteur de bruit MPEG
Backlight control (Contrôle du rétro-éclairage)
Standards de couleurs : PAL, SECAM, NTSC Pal

Son

Nicam Stéréo
Dolby Digital Plus
Dolby Digital Pulse
Audyssey EQ, ABX et Dynamique Volume
Audyssey Volume Extension
Puissance Audio 2 x 10W

Réception

Tuner TNT HD (CI +)
Analogique / DVB-T / DVB-C
Systems TV : PAL BG/I/DK SECAM BG/DK/L NTSC BG 4.43

Connectique

Entrées

1 prise Péritel (RVB)
4 HDMI (CEC) dont 3 coté et 1 ARC
2 USB (Enreg., Vidéo, Photo, Musique)
1 prise PC SubD 15
Interface commune CI+
1 vidéo composante / composite RCA
1 prise RJ45 (LAN)

Sorties

1 prise casque
1 audio numérique (optique)

Multimédia


Portail Cloud TV
Navigateur Internet
WiFi intégré
DLNA, MHL
PVR (Enregistrement via USB)
Intel Widi 3.5 (Wireless Display)
Skype Ready (Caméra optionnelle)
Guide EPG connecté (Media Guide)

Confort

Capteur de luminosité, Conversion 2D>3D,
Télétexte, Guide Electronique des
programmes, Timer, Blocage clavier
VESA : 40'' : 200 x 200 mm (M6)
50'' : 400 x 200 mm (M8)



	40L7333DF	50L7333DF
Ecran (en cm)	102 cm	126 cm
Conso. Marche ⁽¹⁾	48,1 W	75,9 W
Conso. Veille	0,3 W	0,3 W
Dim. Emballé en mm (LxHxP)	1009 x 680 x 126	1296 x 784 x 154
Dim. avec pied en mm (LxHxP)	922 x 600 x 182	1131 x 733 x 232
Dim. sans pied en mm (LxHxP)	922 x 544 x 42-15	1131 x 675 x 43-25
Poids emballé	15 kg	26,5 kg
Poids avec pied / sans pied	12 / 10,6 kg	20 / 17,7 kg
Classe Energ.	A +	A +
Présence Plomb (sous ROHS limite)	Oui	Oui
Présence Mercure	< 0,1 mg/kg	< 0,1 mg/kg
EAN	5900496527133	5900496527171
Eco. Taxe	1,67 € HT / 2 € TTC	3,34 € HT / 4 € TTC

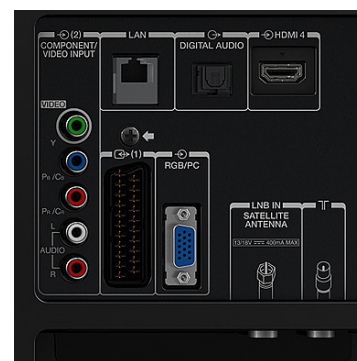

*Contraste dynamique : défini par les standards Toshiba et fondé sur des résultats mesurés.

(1) : Mode Standard EN62087

TOSHIBA
Leading Innovation >>>

Les informations contenues dans ce document sont susceptibles d'être modifiées sans préavis. Sauf erreur ou omission – Document et photos non contractuels
Les marques citées sont déposées par leurs propriétaires respectifs

Vous pouvez obtenir en quelques minutes toutes les informations sur nos produits en consultant notre site Internet : www.toshiba.fr

Information produit



Information

TOSHIBA

Constructeur Toshiba

Réf. Produit 47L7453DG

Toshiba 47L7453DG - 47" 3D TV LED

Fiche technique

Général

Type de Produit	TV LCD avec rétroéclairage par LED - Smart TV
Classe d'efficacité énergétique	Classe A+
Consommation électrique	182 Watt
Consommation électrique en mode marche	67.4 W
Consommation d'énergie annuelle	93.5 kWh
Taille d'écran	47"
Diagonale d'écran (cm)	119 cm
Séries	L7 Series
3D	Oui (lunettes 3D incluses (4 paires))
Technologie 3D	Passive
Tuner de télévision	1 x combinaison numérique / analogique
Interface vidéo	Composant, composite, HDMI, SCART
Qté de ports HDMI	4 port(s)
Interface PC	VGA (HD-15)
Compatible HDCP	Oui
Fonctions du minuteur	Mise en sommeil
Dimensions	Avec support
Largeur	107.1 cm
Profondeur	21.5 cm

Hauteur	66.2 cm
Poids	13.5 kg
Couleur du boîtier	Noir brillant

Affichage

Résolution	1920 x 1080
Format d'affichage	1080p (FullHD)
Rapport d'image	16:9
Technologie d'amélioration du mouvement	1500 Hz Active Motion Rate
Technologie de rétroéclairage LCD	Rétroéclairage par LED - système de rétroéclairage en bordure par DEL Edge-Lit, direct-lit LED
Rapport de contraste d'image	1600:1
Luminosité	700 cd/m2
Mode écran large	4:3 classique
Angle de visualisation	178 degrés
Temps de réponse	5 ms
Langue du menu d'affichage	Danois, hébreu, hongrois, tchèque, Croate, Slovène, Slovaque, Ukrainien, anglais, allemand, français, italien, norvégien, portugais , polonais , finnois , russe, espagnol, hollandais , grec, turc, bulgare, serbo-croate, roumain
Filtre en nid d'abeille	Numérique 3D
Contrôle de la température des couleurs	Oui
Fonctions commerciales	Mode hotel
Capacité de clonage de paramètres	Oui
Caractéristiques	Mise hors tension automatique, Contraste Dynamique, capteur de lumière ambiante ALS (Ambient Light Sensor), Audio Description (AD), détection automatique du format (AFD), mode jeu, 3D Color Management, AutoView, Resolution Plus, réduction du bruit vidéo numérique (DNR), réduction du bruit MPEG, PVR Ready, conversion 2D/3D, verrouillage du panneau de commande, mémo congélation, Intel Wireless Display (WiDi), CEVO Engine, Mobile High-Definition Link (MHL), Mega Contrast

Tuner de télévision

Tuner TV analogique	NTSC, PAL, SECAM
Accès conditionnel	Logement Common Interface Plus (CI+)
Système de réception	SECAM-D, SECAM-B, SECAM-K, PAL-B, SECAM-G, PAL-G, PAL-I, PAL-D, SECAM-L, PAL-K
Système de Réception Stéréo	NICAM

Tuner TV numérique

Tuner TV numérique	DVB-C, DVB-T, DVB-T2
---------------------------	----------------------

Profils et niveaux MPEG	MPEG4 AVC/H.264
-------------------------	-----------------

Fonctionnalités vidéo

Signaux d'entrée vidéo analogique	NTSC, PAL, SECAM, NTSC4.43
-----------------------------------	----------------------------

Formats vidéo d'entrée	480p, 720p, 1080i, 1080p, 480i, 576i, 576p, 720i
------------------------	--

Télétexte	Oui
-----------	-----

Mémoire Télétexte	500 pages
-------------------	-----------

Guide électronique des programmes	EPG numérique, Now & Next
-----------------------------------	---------------------------

Lecteur multimédia

Port USB	Oui , 2 port(s)
----------	-----------------

Télécommande

Type	Télécommande
------	--------------

Modèle de télécommande	Toshiba CT-90430
------------------------	------------------

Système audio

Format audio numérique	Sortie numérique Dolby, sortie Dolby Digital Plus, sortie Dolby Pulse
------------------------	---

Mode Surround	Oui
---------------	-----

Bruitages	Bass Boost, DTS Premium Sound 5.1, DTS Express 5.1
-----------	--

Système de haut-parleurs	2 haut-parleurs
--------------------------	-----------------

Alimentation en sortie / Total	30 Watt
--------------------------------	---------

Caractéristiques supplémentaires	Son virtual surround, SoundNavi, Dolby Digital Plus, Dolby Pulse
----------------------------------	--

Haut-parleur(s)	2 x haut-parleur à canal principal - intégré - 15 Watt
-----------------	--

Multimédia réseau et Internet

Fonctionnalités	Navigation WEB, Cloud TV
-----------------	--------------------------

Connectivité	Wi-Fi, LAN
--------------	------------

Chiffrement	Wi-Fi Protected Setup (WPS)
-------------	-----------------------------

Services de diffusion en streaming sur Internet	HbbTV, Toshiba Connect Apps, MediaGuide
---	---

DLNA	Oui
------	-----

Connexions

Type de connecteur	1 x HDMI (HDMI 19 broches de type A) - arrière 3 x HDMI (HDMI 19 broches de type A) - côté 1 x réseau (RJ-45) 1 x entrée vidéo composite/vidéo en composantes 1 x SCART (SCART 21 broches) 1 x entrée VGA (D-Sub HD 15 broches (HD-15)) 2 x USB (USB à 4 broches, type A) 1 x sortie audio numérique (optique) (TOSLINK) 1 x casque (fiche mini-phone Stéréo 3,5 mm)
--------------------	--

Supports et systèmes de montage

Pied	Inclus
------	--------

Type de support	De table
-----------------	----------

Couleur du support	Argenté(e)
Interface de montage pour écran plat	400 x 200 mm

Divers

Accessoires inclus	2 piles AAA
Câbles inclus	Adaptateur vidéo composant Adaptateur composite

Alimentation

Périphérique d'alimentation	Alimentation
Tension nominale	CA 230V (50 Hz)
Consommation électrique en mode d'attente	0.5 Watt

Dimensions & Poids

Dimensions & Poids	Panneau sans support au sol - 107.1 cm x 8.952 cm x 62.3 cm x 12.3 kg Panneau avec support au sol - 107.1 cm x 21.5 cm x 66.2 cm x 13.5 kg
--------------------	---

Dimensions et poids (emballé)

Largeur (emballée)	120.6 cm
Profondeur (emballée)	14.5 cm
Hauteur (Expédition)	71 cm
Poids (Expédition)	17 kg

HUAWEI Room Presence Series

HUAWEI Room Presence series bring people together in a best ever virtual meeting experience and enable face to face collaboration as personal as being in the same room. It is a cost-effective solution which helps reduce costs and accelerate decision-making for enterprises.

Next-Generation Technology for Superior HD Experience at Lower Bandwidth

Supports Video Motion Enhancement (VME) and H.264 HP; saves 50% of bandwidth.

Proprietary VME combined with intelligent face recognition and video image processing helps RP adapt to different lighting conditions, reduce bandwidth consumption, and enhance video quality.

Ease of Use

With an innovative and well organized GUI (Graphical User Interface), HUAWEI Room Presence series enable users to operate the system easily and efficiently.

Voice Dialing

RP recognize multiple languages. You can call or join a conference by saying the name of the scheduled conference or the site name.

Outstanding Network Adaptability and Security Mechanism

Patented Super Error Concealment (SEC) ensures high-quality video experience even with packet loss of 20 percent.

Supports H.264 SVC to adapt to different bandwidths, device capabilities, and network requirements.

Standard H.460 and proprietary SNP technology guarantee secure firewall traversal.

H.235 media stream and signaling encryption; SRTP, TLS, and HTTPS encryption.

Flexible options

Multi size (55", 46") displays for selection.

Single and Dual displays for selection.

Flexible deployment: pedestal stand or pedestal stand with wheels.



RP100-46S: Single 46" display
RP100-55S: Single 55" display



RP200-46S: Dual 46" displays
RP200-55S: Dual 55" displays



HUAWEI Room Presence System Specifications

System Components

HD Codec, built-in camera and VPM220, display and remote control

Optional: 10" touch panel (Release in future)

Standard & Protocols

Standards and Protocols: ITU-T H.323, IETF SIP

Video Standards & Protocols: H.263, H.263+, H.264 BP, H.264 HP, H.264 SVC

Audio Standards & Protocols: G.711, G.722, G.728, G.722.1*, G.722.1C*, AAC-LD, HWA-LD

Dual Stream: ITU-T H.239, SIP

Other Standards: H.221, H.225, H.230, H.231, H.233, H.234, H.235, H.241, H.242, H.243, H.245, H.281, H.283, H.350, H.460, T.140

Network Standards & Protocols: TCP/IP, FTP, FTPS, DHCP, SNMP, Telnet, SSH, HTTP, HTTPS, PPPoE, RTP, RTCP, SNTP

Bandwidth requirements

Frame	Minimum	Recommended
720p 30fps	384 kbps	768 kbps
720p 60fps	512 kbps	1 Mbps
1080p 30fps	512 kbps	1 Mbps

Video Specifications and Features

People Video Resolution:

- 1080p (25/30fps), 720p (50/60fps), 720p (25/30fps)

Content Video Resolution:

- Input: VGA (640 x 480) @ 60/72/75/85 fps, SVGA (800 x 600) 56/60/72/75/85 @ fps, XGA (1024 x 768) @ 60/70/75/85 fps, 1152 x 864 @ 60/75/85 fps, 1280 x 600 @ 60 fps, WXGA (1280 x 768) @ 60/75/85 fps, WXGA (1280 x 800) @ 60/75/85 fps, 1280 x 960 @ 60/75/85 fps, SXGA (1280 x 1024) @ 50/60/72/75/85 fps, 1360 x 768 @ 60 fps, 1366 x 768 @ 60 fps, 1440 x 900 @ 60 fps, XGA+ (1400 x 1050) @ 60 fps, 720p @ 60/75/85 fps, 1080p @ 60 fps, 1600 x 900 @ 60 fps, 1600 x 1200 @ 60 fps, 1680 x 1050 @ 60 fps, 1920 x 1200 @ 60 fps
- Coding/Decoding resolution: 800 x 600, 1024 x 768, 1280 x 1024, 1280 x 720, 1920 x 1080
- Output: 800 x 600, 1024 x 768, 1280 x 1024, 1280 x 720, 1920 x 1080

Dual Stream: Dual 1080p; Dual 720p @ 30 fps

1080p HD Camera:

- Lens: 2-megapixel and 1/3-inch CMOS imaging chip
- Zoom: 12x optical
- Maximum horizontal angle: 72°horizontal field of view
- Panning/Tilting angle: +/-30° tilt, +/- 100° pan
- Automatic White Balance (AWB), Automatic Exposure (AE), Automatic Focus (AF)
- Far-end camera control

Other Video Features	Intelligent Face Detection Picture in Picture, Picture outside Picture	VME (Video Motion Enhancement) Video Intensifier View Processing
----------------------	--	--

Audio Specifications and Features

Audio features:

- Dual-channel AAC-LD Stereo
- Acoustic Echo Cancellation (AEC)
- Acoustic Noise Suppression (ANS) 12 dB
- Automatic Gain Control (AGC) ±6 dB
- Voice Clear, Audio Enhancer
- Lip synchronization

Security and Stability

Network:

- Super Error Concealment (SEC), Intelligent Rate Control (IRC)
- Automatic Repeat-reQuest (ARQ), Forward Error Correction (FEC), PLC

Security:

- H.235 signaling and media stream encryption
- AES media stream encryption, dual-stream encryption
- TLS and SRTP for SIP signaling and media stream encryption
- Conference access password, conference control password
- Administrator password, SSH/HTTPS

Firewall Traversal: H.460.18, H.460.19 firewall traversal, Static NAT, SNP

Bandwidth

IP: 64 Kbps to 4 Mbps

Interfaces

Audio Inputs: 1 x 3.5 mm line-in jack, 1 x HD-AI (stereo, connects to microphone array)

Audio Outputs: 1 x 3.5 mm line-out jack, 1 x HDMI

Video Inputs: 1 x VGA, 1 x Built-in Camera

Video Outputs: 1 x VGA/YPbPr, 1 x HDMI

USB Interfaces: 1 x USB 2.0 Host

Network Interfaces:

- IP: 10/100 Base-T, 1 x RJ45
- Wireless: Built-in Wi-Fi

Application Features

Languages: Simplified Chinese, Traditional Chinese, English, German, Spanish, French, Norwegian, Italian, Polish, Russian, Portuguese, Hungarian, Finnish, Romanian, Czech, Swedish, Arabic, Turkish, Greek

- | | |
|---|---|
| <ul style="list-style-type: none"> Voice Dialing in English and Chinese Installation from a USB disk, Plug and play Integration with Microsoft Lync2010™ and OCS2007R2 Hybrid with IMS network IPv6 Wi-Fi SiteCall Lock Site/Conference | <ul style="list-style-type: none"> Web-based conference management Web-based image monitoring and HD picture snapshot 16:9 and 4:3 mixed display Picture-in-picture: 1/16 picture size, optional position Split output: Bi-screen and tri-screen display LDAP/Network address book API for integration |
|---|---|

Special Features

- | | |
|---|---|
| <ul style="list-style-type: none"> Caption banner, body text and information bar Rolling display mode of the speech draft Modifiable front background color, caption size and transparency 64 optional colors | <ul style="list-style-type: none"> Editable caption and auto zone adjustment Caption rolling mode setting Site name display and position shift Text input through remote control External character generator Powerful caption SMS function |
|---|---|

Maintenance Management

Maintain Methods:

- Remote control: 3D Effects & GUI Animation
- Endpoints Network Management: SNMP
- Embedded Web server, GUI interface
- Command line mode: Telnet/SSH

Maintain Functions:

- Endpoint IP and number are displayed on the front panel
- Auto sleep, wake-up by remote control or remote module
- Event log record, query, display and export query results
- IP network test, default settings restoration
- Local and remote loopback
- Test signals: providing sound test and standard test stripes

Physical Characteristics

Dimensions (H x W x D)

- RP200-55S: 5'10" x 8'3" x 1'7" feet (1782 x 2550 x 500mm)
- RP200-46S: 5'6" x 7'1" x 1'7" feet (1692 x 2170 x 500mm)
- RP100-55S: 5'10" x 4'1" x 1'7" feet (1782 x 1270 x 500mm)
- RP100-46S: 5'6" x 3'6" x 1'7" feet (1692 x 1080 x 500mm)

Weight:

- RP200-55S: 216 lb (90 kg); RP200-46S: 176 lb (80 kg);
- RP100-55S: 143 lb (65 kg); RP100-46S: 132 lb (60 kg).

Power Supply & Power Consumption:

- Working voltage: 100 - 240 VAC
- Working frequency: 50 - 60 Hz
- Power consumption:
- RP200-55S: 307 W; RP200-46S: 247 W
- RP100-55S: 177 W; RP100-46S: 147 W

Environmental Specification:

- Operating Temperature: 32 to 104°F (0° C to 40°C)
- Operating Humidity: 10 to 80%
- Non-Operating Temperature: -40° to -70° C
- Non-Operating Humidity (Non-condensing): 0% to 95%
- Peripheral noise: < 46 dBA SPL
- Lowest luminance: 7 lux
- Recommended luminance: > 300 lux

Approval and Compliance: CE, CCC, FCC, UL

*: G.722.1/G.722.1C, licensed from Polycom®

HUAWEI Room Presence Series

HUAWEI Room Presence series bring people together in a best ever virtual meeting experience and enable face to face collaboration as personal as being in the same room. It is a cost-effective solution which helps reduce costs and accelerate decision-making for enterprises.

Next-Generation Technology for Superior HD Experience at Lower Bandwidth

Supports Video Motion Enhancement (VME) and H.264 HP; saves 50% of bandwidth.

Proprietary VME combined with intelligent face recognition and video image processing helps RP adapt to different lighting conditions, reduce bandwidth consumption, and enhance video quality.

Ease of Use

With an innovative and well organized GUI (Graphical User Interface), HUAWEI Room Presence series enable users to operate the system easily and efficiently.

Voice Dialing

RP recognize multiple languages. You can call or join a conference by saying the name of the scheduled conference or the site name.

Outstanding Network Adaptability and Security Mechanism

Patented Super Error Concealment (SEC) ensures high-quality video experience even with packet loss of 20 percent.

Supports H.264 SVC to adapt to different bandwidths, device capabilities, and network requirements.

Standard H.460 and proprietary SNP technology guarantee secure firewall traversal.

H.235 media stream and signaling encryption; SRTP, TLS, and HTTPS encryption.

Flexible options

Multi size (55", 46") displays for selection.

Single and Dual displays for selection.

Flexible deployment: pedestal stand or pedestal stand with wheels.



RP100-46S: Single 46" display
RP100-55S: Single 55" display



RP200-46S: Dual 46" displays
RP200-55S: Dual 55" displays



HUAWEI Room Presence System Specifications

System Components

HD Codec, built-in camera and VPM220, display and remote control

Optional: 10" touch panel (Release in future)

Standard & Protocols

Standards and Protocols: ITU-T H.323, IETF SIP

Video Standards & Protocols: H.263, H.263+, H.264 BP, H.264 HP, H.264 SVC

Audio Standards & Protocols: G.711, G.722, G.728, G.722.1*, G.722.1C*, AAC-LD, HWA-LD

Dual Stream: ITU-T H.239, SIP

Other Standards: H.221, H.225, H.230, H.231, H.233, H.234, H.235, H.241, H.242, H.243, H.245, H.281, H.283, H.350, H.460, T.140

Network Standards & Protocols: TCP/IP, FTP, FTPS, DHCP, SNMP, Telnet, SSH, HTTP, HTTPS, PPPoE, RTP, RTCP, SNTP

Bandwidth requirements

Frame	Minimum	Recommended
720p 30fps	384 kbps	768 kbps
720p 60fps	512 kbps	1 Mbps
1080p 30fps	512 kbps	1 Mbps

Video Specifications and Features

People Video Resolution:

- 1080p (25/30fps), 720p (50/60fps), 720p (25/30fps)

Content Video Resolution:

- Input: VGA (640 x 480) @ 60/72/75/85 fps, SVGA (800 x 600) 56/60/72/75/85 @ fps, XGA (1024 x 768) @ 60/70/75/85 fps, 1152 x 864 @ 60/75/85 fps, 1280 x 600 @ 60 fps, WXGA (1280 x 768) @ 60/75/85 fps, WXGA (1280 x 800) @ 60/75/85 fps, 1280 x 960 @ 60/75/85 fps, SXGA (1280 x 1024) @ 50/60/72/75/85 fps, 1360 x 768 @ 60 fps, 1366 x 768 @ 60 fps, 1440 x 900 @ 60 fps, XGA+ (1400 x 1050) @ 60 fps, 720p @ 60/75/85 fps, 1080p @ 60 fps, 1600 x 900 @ 60 fps, 1600 x 1200 @ 60 fps, 1680 x 1050 @ 60 fps, 1920 x 1200 @ 60 fps
- Coding/Decoding resolution: 800 x 600, 1024 x 768, 1280 x 1024, 1280 x 720, 1920 x 1080
- Output: 800 x 600, 1024 x 768, 1280 x 1024, 1280 x 720, 1920 x 1080

Dual Stream: Dual 1080p; Dual 720p @ 30 fps

1080p HD Camera:

- Lens: 2-megapixel and 1/3-inch CMOS imaging chip
- Zoom: 12x optical
- Maximum horizontal angle: 72°horizontal field of view
- Panning/Tilting angle: +/-30° tilt, +/- 100° pan
- Automatic White Balance (AWB), Automatic Exposure (AE), Automatic Focus (AF)
- Far-end camera control

Other Video Features	Intelligent Face Detection Picture in Picture, Picture outside Picture	VME (Video Motion Enhancement) Video Intensifier View Processing
----------------------	--	--

Audio Specifications and Features

Audio features:

- Dual-channel AAC-LD Stereo
- Acoustic Echo Cancellation (AEC)
- Acoustic Noise Suppression (ANS) 12 dB
- Automatic Gain Control (AGC) ±6 dB
- Voice Clear, Audio Enhancer
- Lip synchronization

Security and Stability

Network:

- Super Error Concealment (SEC), Intelligent Rate Control (IRC)
- Automatic Repeat-reQuest (ARQ), Forward Error Correction (FEC), PLC

Security:

- H.235 signaling and media stream encryption
- AES media stream encryption, dual-stream encryption
- TLS and SRTP for SIP signaling and media stream encryption
- Conference access password, conference control password
- Administrator password, SSH/HTTPS

Firewall Traversal: H.460.18, H.460.19 firewall traversal, Static NAT, SNP

Bandwidth

IP: 64 Kbps to 4 Mbps

Interfaces

Audio Inputs: 1 x 3.5 mm line-in jack, 1 x HD-AI (stereo, connects to microphone array)

Audio Outputs: 1 x 3.5 mm line-out jack, 1 x HDMI

Video Inputs: 1 x VGA, 1 x Built-in Camera

Video Outputs: 1 x VGA/YPbPr, 1 x HDMI

USB Interfaces: 1 x USB 2.0 Host

Network Interfaces:

- IP: 10/100 Base-T, 1 x RJ45
- Wireless: Built-in Wi-Fi

Application Features

Languages: Simplified Chinese, Traditional Chinese, English, German, Spanish, French, Norwegian, Italian, Polish, Russian, Portuguese, Hungarian, Finnish, Romanian, Czech, Swedish, Arabic, Turkish, Greek

- | | |
|---|---|
| <ul style="list-style-type: none"> Voice Dialing in English and Chinese Installation from a USB disk, Plug and play Integration with Microsoft Lync2010™ and OCS2007R2 Hybrid with IMS network IPv6 Wi-Fi SiteCall Lock Site/Conference | <ul style="list-style-type: none"> Web-based conference management Web-based image monitoring and HD picture snapshot 16:9 and 4:3 mixed display Picture-in-picture: 1/16 picture size, optional position Split output: Bi-screen and tri-screen display LDAP/Network address book API for integration |
|---|---|

Special Features

- | | |
|---|---|
| <ul style="list-style-type: none"> Caption banner, body text and information bar Rolling display mode of the speech draft Modifiable front background color, caption size and transparency 64 optional colors | <ul style="list-style-type: none"> Editable caption and auto zone adjustment Caption rolling mode setting Site name display and position shift Text input through remote control External character generator Powerful caption SMS function |
|---|---|

Maintenance Management

Maintain Methods:

- Remote control: 3D Effects & GUI Animation
- Endpoints Network Management: SNMP
- Embedded Web server, GUI interface
- Command line mode: Telnet/SSH

Maintain Functions:

- Endpoint IP and number are displayed on the front panel
- Auto sleep, wake-up by remote control or remote module
- Event log record, query, display and export query results
- IP network test, default settings restoration
- Local and remote loopback
- Test signals: providing sound test and standard test stripes

Physical Characteristics

Dimensions (H x W x D)

- RP200-55S: 5'10" x 8'3" x 1'7" feet (1782 x 2550 x 500mm)
- RP200-46S: 5'6" x 7'1" x 1'7" feet (1692 x 2170 x 500mm)
- RP100-55S: 5'10" x 4'1" x 1'7" feet (1782 x 1270 x 500mm)
- RP100-46S: 5'6" x 3'6" x 1'7" feet (1692 x 1080 x 500mm)

Weight:

- RP200-55S: 216 lb (90 kg); RP200-46S: 176 lb (80 kg);
- RP100-55S: 143 lb (65 kg); RP100-46S: 132 lb (60 kg).

Power Supply & Power Consumption:

- Working voltage: 100 - 240 VAC
- Working frequency: 50 - 60 Hz
- Power consumption:
- RP200-55S: 307 W; RP200-46S: 247 W
- RP100-55S: 177 W; RP100-46S: 147 W

Environmental Specification:

- Operating Temperature: 32 to 104°F (0° C to 40°C)
- Operating Humidity: 10 to 80%
- Non-Operating Temperature: -40° to -70° C
- Non-Operating Humidity (Non-condensing): 0% to 95%
- Peripheral noise: < 46 dBA SPL
- Lowest luminance: 7 lux
- Recommended luminance: > 300 lux

Approval and Compliance: CE, CCC, FCC, UL

*: G.722.1/G.722.1C, licensed from Polycom®

Le Contrat Sérénité DWPro

Le contrat Sérénité vous permet une totale prise en charge des problèmes techniques que peuvent rencontrer vos clients, dans l'utilisation quotidienne des produits de visioconférence LifeSize et ses périphériques (meuble, écran) fournis par DWPro.

La souscription à ce contrat vous permet d'obtenir une extension aux garanties constructeurs habituelles (voir descriptif du contrat ci-dessous)

	Garantie constructeur	Contrat Sérénité DWPro
Extension de garantie constructeur du terminal pendant la durée du contrat (1 à 5 ans).	✓	✓
Assistance téléphonique et/ou par mail illimitée (en Anglais), (Hot Line) 5 jours sur 7 du lundi au vendredi de 9H00 à 18H00 (hors jours fériés). http://www.lifesize.com/Support/Global_Support.aspx	✓	✓
Echange standard des équipements sous garantie à J+1 (Advance Replacement) pendant toute la durée du contrat (après constatation d'une panne matériel avérée) : cliquez ici pour voir le descriptif précis de la procédure de SAV Lifesize :	✓	✓
Mises à jour des logiciels du constructeur (mineures et majeures) pendant toute la durée du contrat	✓	✓
Ce que vous apporte le Contrat Sérénité de DWPRO en plus de la Garantie Constructeur		
Assistance téléphonique et/ou par mail illimitée en Français (Hot Line) 5 jours sur 7 du lundi au vendredi de 9H00 à 18H00 (hors jours fériés).	✗	✓
Assistance possible directement par visioconférence.	✗	✓
Un point d'accès dédié pour toutes les demandes d'échanges, de réparations ou prestations techniques complémentaires.	✗	✓
Une vérification annuelle du terminal à distance.	✗	✓
Prise en main du terminal à distance pour dépannage	✗	✓
Tarif préférentiel sur d'éventuelles interventions physiques sur site	✗	✓
En cas de panne, mise à disposition d'une solution alternative de communication sous 24 / 48h	✗	✓

Tous les contrats de maintenance et de services sont réassurés directement auprès du constructeur.

Ce document est un descriptif et ne peut, en aucun cas, faire office de contrat. Valable en France métropolitaine.



INTERCALAIRE FIREFOX

v33

SWG

Plateforme web multi canal de gestion commerciale

Fonctionnalités

SiWiGo	SWG	ParamétrageOptions
--------	-----	--------------------

MODULES

Généralités

Multi stés (multi-dossier)		✓
Multi-établissements	✓	✓
Recherche multi-critères	✓	✓
Personnalisation des pièces commerciales		✓
Champs personnalisables dans fichiers		✓
Tableau de bord	✓	✓
Droits utilisateurs	✓	user/profil
Générateur d'états		✓
Logo entreprise (pour pièces commerciales)	✓	✓
Rattachement de documents électroniques sur articles, tiers, pièces commerciales, affaires.	✓	✓
Texte entête/pied sur pièce commerciale	✓	✓
Export vers Excel, pdf, Html	✓	✓
Gestion des tâches	✓	✓
Déclenchement BL client sur réception		✓
Import / Export (DEB)		✓

E-commerce

Création de site e-commece		Agence Si Web
Fonctionnalités e-commerce	✓	
Back-office commun	✓	

CRM

Gestion des suspects	✓	✓
Gestion des prospects	✓	✓
Gestion des contacts	✓	✓
Affaires commerciales	✓	✓
Liste de l'activité commerciale	✓	✓

Evènements clients	✓	✓	Option Si Man
Campagne e-mailing			
Importation de leads	✓	✓	

Collaboratif

Agenda	✓	Synchro
Notes	✓	Google
Gestion des projets	✓	✓

Docs Ventes

Devis	✓	✓
Bon de commande	✓	✓
Bon de préparation	✓	✓
Bon de livraison	✓	✓
Facture / Avoir	✓	✓
Facturation groupée	✓	✓
Gestion des Bons de transport		✓
Gestion des abonnements clients	✓	✓
Facture d'acompte	✓	✓
Bon / retour de prêts client	✓	✓

Docs Achats

Appel d'offres (devis fournisseurs)	✓	✓
Bon de commande	✓	✓
Bon de réception	✓	✓
Facture / Avoir	✓	✓

Docs communs

Gestion des eco-taxes	✓	✓	
Port en pied	✓	✓	
Remises lignes	✓	✓	
Remise en pied	✓	✓	
Gestion des reliquats	✓	✓	
Règlements	✓	✓	
Multi-devises	✓	✓	
Alertes paramétrables sur pièces			
Traitement par lots		✓	
Format d'impression	✓	PDF	
Envoi direct des pièces par mail	✓	✓	
Transformation directe Commande en facture	✓	✓	
Duplication d'un document	✓	✓	
Gestion EDI (avec prestataire)			
Consultation direct du stock (en vente)	✓	✓	
Consultation de l'historique produit/client	✓	✓	
Sous-totaux		✓	
Fichiers joints	✓	✓	

SAV		
Gestion des appels SAV		✓
Dossier SAV		✓
Bon de retour	✓	✓
Statut du dossier		✓
Gestion du parc matériel client (garantie, contrat de maintenance)		✓
Gestion contrats de maintenance (visites préventives, facturation par abonnement)		
Planification des interventions		✓
		Prestation

Stocks		
Méthode valorisation	✓	LIFO/FIFO/DP A/PAMP
Multi-dépôt	✓	✓
Bon inter-dépôt	✓	✓
Inventaires (fixes, tournants)	✓	✓
Saisie mouvements entrées/sorties	✓	✓
Stock de sécurité mini / maxi	✓	✓
Gestion des alertes sur rupture	✓	✓
Module de réapprovisionnement	✓	✓
Gestion contre-marque (flux tendu)	✓	✓
Gestion N° lot		✓
Gestion N° série	✓	✓
Gestion DLC, DLUO		✓
Gestion des emplacements		✓
Historiques des mouvements	✓	✓
Prise en charge terminaux inventaire		
		Prestation

Articles		
Classement (Familles, sous-familles, etc...)	✓	Hierarchique
Marque produit	✓	✓
Gestion des Nomenclatures	✓	✓
Grille (tailles/couleurs)	✓	✓
Articles de remplacement	✓	Si obsolète uniqu. pour le e-commerce
Produits associés	✓	uniqu. pour le e-commerce
Gestion multi-critères	✓	✓
Prix d'achat, de revient, Prix de vente	✓	(multiple)
Images produits	1 seule	✓
Duplication de fiche	✓	✓
Typage article (standard, prestations, Matières premières,...)	✓	✓
Gestion des taxes	✓	Tva, eco-taxe
Unité produit (unité, poids, mètres, etc...)	✓	✓
Gestion des garanties		✓

Code barre	✓	unité/colis/palette
Base cache produits		5 possibles
Fichiers joints	✓	✓

Tarifs

Tarifs vente simple	✓	8 tarifs par article
Tarifs vente complexe	✓	✓
Tarifs achats (multi-fournisseurs)	✓	✓
Gestion des promotions		Prestation

Tiers

Clients	✓	✓
Fournisseurs	✓	✓
Contacts	✓	✓
Multi-adresses LIV/FAC	✓	✓
Familles tiers	✓	✓
Accès direct au site du tiers	✓	✓
Visualisation du tiers sur Google Maps	✓	✓
Duplication de fiche	✓	✓
Gestion hiérarchique clients (centrale, groupement)	✓	✓
Fichiers joints	✓	✓

Vendeurs

Hiérarchie vendeurs	✓	3 possibles
Gestion des secteurs	✓	✓
Sur documents de ventes	✓	✓
Visibilité que de ses clients	✓	✓
Statistiques	✓	✓
Gestion des commissionnements		✓

Statistiques


Historiques ventes (cdes / factures)	✓	✓
Historiques achats (cdes / factures)	✓	✓
CA & Marge Année/Mois/Jour	✓	✓
Comparatif N / N-1	✓	✓
Panier moyen année/mois/jour	✓	✓
Hit parade clients, articles	✓	✓

Production (services)

Gestion de projets / Phases / Tâches		✓
Saisie du temps		✓
Diagramme de Gantt		✓
Attachement d'évènements		✓
Edition de rapport		✓
Edition du temps passé par projet		✓

Gestion de fabrication

Gestion des composés / composants
 Ordre et bon de fabrication
 Calcul des besoins
 Planning de fabrication




Prestation
 Prestation

Comptabilité

Edition des journaux achats/ventes



 Export des écritures et tiers vers...



✓
 Sage, CEGID,
 Quadratus,
 Business Soft
 en natif

Outils

Import de fichiers fixes
 Import de fichiers paramétrables
 Reprise de données
 Interface avec logiciels tiers
 Fonctionnalités spécifiques



Prestation
 Prestation
 Prestation
 Prestation

Modules complémentaires

Module déconnecté

Application off-line

Paramétrages spécifiques

Plusieurs types de synchronisation

Option

Option

Option

Module Caisse

Multi-magasins

Multi-vendeurs

Saisie spéciale

Gestion des clotures

Encaissements / décaissements

Fonctionne avec lecteur code barre

Edition des tickets de caisse

Edition des étiquettes avec code barre

Gestion des ventes en attente

Critères sur articles (saisonnalités, etc...)

Saisie de la météo

Gestion des grilles tailles / coloris

Edition

Edition par mode de paiement

Edition de statistiques

✓

✓

✓

✓

✓

✓

✓

✓

✓

✓

✓

✓

✓

✓

✓

Module concessionnaires

Applications spécialisés concessions

Gestion des bons de chantiers

Paramétrages spécifiques

✓

✓

✓

Module e-commerce

Connecteurs avec e-commerce

✓

SWGCommerce,
PrestaShop Magento,
Oxatis, Drupal



Conclusion

Les réponses apportées à votre demande, ont été étudiées minutieusement afin de s'assurer de la bonne marche de celles-ci. L'ensemble des technologies présentées est valide, opérationnel et éprouvé. Nous espérons vivement que vous serez convaincu de la pertinence de notre offre et que vous nous accorderez votre confiance.

Si toutefois, certaines informations vous manquaient, l'ensemble de nos équipes se tient à votre disposition pour vous les communiquer.